



David Round, Inc.  
Ruger Division  
32405 Aurora Road  
Solon, OH 44139  
Phone: 440-248-4700  
Fax: 440-248-8544  
www.rugerindustries.com

RELIABLE

For detailed  
model  
specifications,  
consult a Ruger  
representative

440-248-4700

HIGHER LIFT

HEAVY-DUTY

## 2500 lb MANUAL PUSH LIFT TRUCK

SIX STANDARD MODELS DESIGNED TO LIFT FROM 45" to 130"

### Standard features on ALL units:

- Frame, mast and legs are a solid weldment.
- Shaft mounted type forks permits fine adjustment in fork width.
- Shaft mounted design permits easy removal of forks. Add attachments quickly.
- Roller bearing phenolic resin wheels and ball bearing swivel casters for easier rolling.
- Two leaf-type lifting chains with dual pulleys for maximum durability and reliability.
- Foot parking brake-rubber foot for maximum holding pressure.
- Plexiglass shield for added safety.
- Versatile handle design permits easy pushing or pulling of unit.
- Hydraulic overload relief set at about 10% above normal rated capacity.
- Includes two, six volt three cell, lead-acid batteries rated at 225 amp/hours at a 20 hour rate
- On board 12 volt, 25 amp automatic battery charger, 117 V AC, 3 amp input
- Large hinged access door protects all components.
- Push button control for lifting and lowering.

### OPTIONAL ACCESSORIES/FEATURES:

- AC powered for lifting. Includes appropriate controls and 6 foot long chord with 3 prong grounded plug for insertion into standard 110V receptacle.
- Compressed air power - replaces DC system on powered lift models. Includes air motor to drive pump; pressure regulator; air filter, moisture collector and oiler for lubrication.
- Steel & polyurethane wheels.
- Steel platform attachments in various configurations.
- Boom attachments, pole attachments, and attachments for drums.
- Remote control pendant.
- Key lock-mounted on upper control panel.
- Hour meter - accumulates working time.
- Battery fuel gauge.
- Sealed maintenance free batteries and charger.

(Additional accessories listed on reverse side)

The unique features of the 2500 series are a 24" load center with lifting forks 1-1/2" thick x 3" wide and 26" long. The forks descend flat to the floor between the legs.

Prices, Specifications, and Options are subject to Change Without Notice.

All Ruger products are shipped F.O.B. Solon, Ohio 44139  
Unit Ships-NMFC #133390 Sub 4 - Class 85

FAX: 440-248-8544

E-mail: info@davidround.com



David Round, Inc.  
 Ruger Division  
 32405 Aurora Road  
 Solon, OH 44139  
 Phone: 440-248-4700  
 Fax: 440-248-8544  
 www.rugerindustries.com

**HEAVY-DUTY**



**HIGHER LIFT**

**RELIABLE**

**ADJUSTABLE**

2500 pound -  
 Manual Push/  
 Manual Lift

**DIMENSIONS and PERFORMANCE DATA Load Boosters**

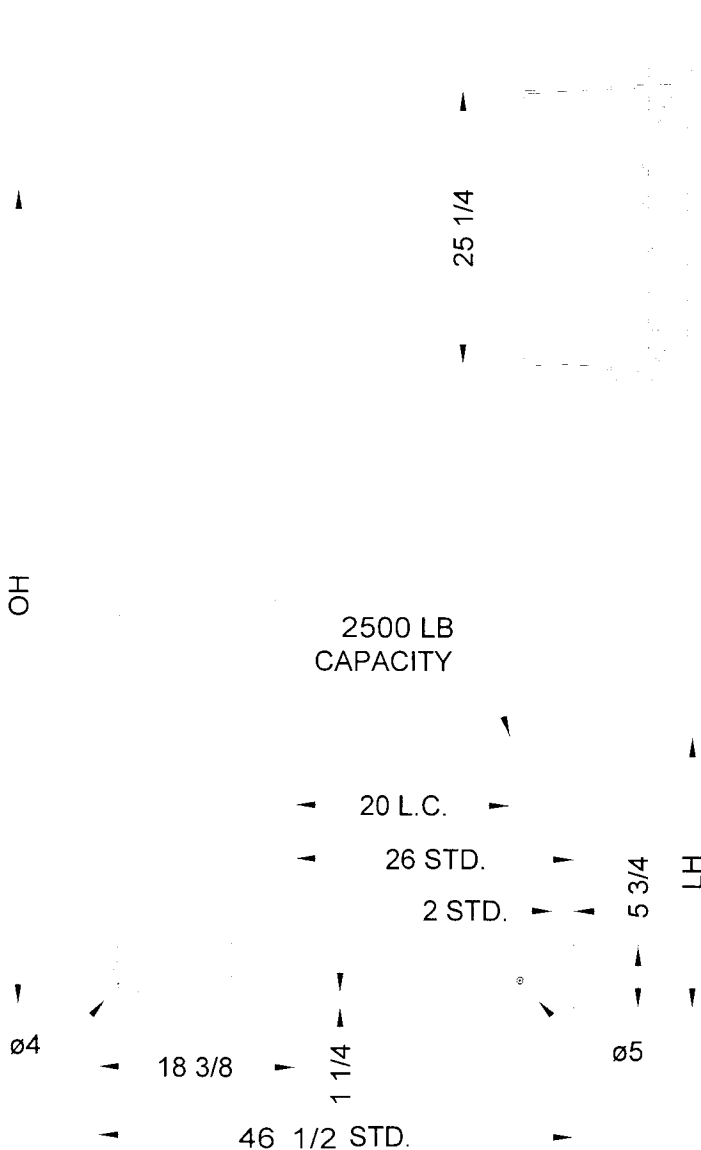

Model Number	Lift Height "LH"	Free Lift	Overall Height "OH"	
			Lowered	Raised
2545-1-0	45	-	63-3/4	-
2555-1-0	55	-	73-3/4	-
2565-1-0	65	-	83-3/4	-
2590-1-1	90	12	63-3/4	111
2510-1-1	110	12	73-3/4	131
2530-1-1	130	12	83-3/4	151

**ADDITIONAL OPTIONAL FEATURES**

- Wider straddle width - fixed legs - 30" between legs is standard. Any other dimension from 31" through 50" may be specified. Narrow width legs are also available.
- Adjustable straddle width, adjusts from 34" to 50".
- Longer forks and legs - 36", 42", and 48" length forks are available.
- Low profile legs - 3 1/2" high. (Standard height is 5 3/4")
- Additional lift height for special applications.

For detailed model specifications, consult a Ruger representative

**440-248-4700**

NOTE: Models cannot be returned or exchanged when ordered and equipped with optional features.