



David Round, Inc.
Ruger Division
10200 Wellman Road
Streetsboro, OH 44241
Phone: 440-248-4700
Fax: 440-248-8544
www.rugerindustries.com

AFFORDABLE

WIDE BASE

VERSATILE

DEPENDABLE

HP-2W

- **4000 lb. Capacity**
- **Wider base for greater versatility**

ACCESSORIES

- **Barrel Grip**
- **Floor Lock**
- **E-Z Steer**
- **Phenolic or Polyurethane Wheels**
- **Extension Boom**
- **Power-Pak**

STANDARD FEATURES


- Meets Ruger's engineering standards of 150% structural overload of maximum rated capacity
- Double action hand pump for quicker and easier lift
- Built-in hydraulic overload relief valve (An original Ruger patent)
- Needle type release valve permits pin-point control over lowering and holding of the heaviest or lightest loads
- Steel casters with roller bearing wheels
- Swivel hook with safety latch and chain to support heavy loads

Prices, Specifications, and Options are subject to Change Without Notice.

All Ruger products are shipped F.O.B. Streetsboro, Ohio 44241
Unit Ships-NMFC #189240 - Class 85 Shipping Wt. 640 lbs

FAX: 440-248-8544

E-mail: info@davidround.com

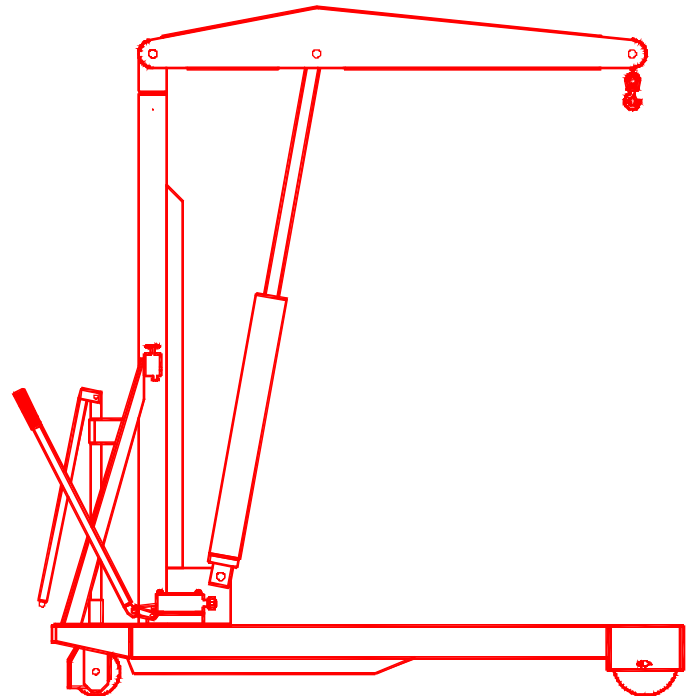

The wide base design makes the HP-2W a powerful and versatile floor crane.

Tested and exceeds ANSI/ASME PALD-12C standards.
Meets ANSI Z.535



David Round, Inc.
 Ruger Division
 32405 Aurora Road
 Solon, OH 44139
 Phone: 440-248-4700
 Fax: 440-248-8544
 www.rugerindustries.com

AFFORDABLE

WIDE BASE

VERSATILE

DEPENDABLE


MODEL: HP-2W

Model	HP-2W
Max. Capacity	4000 lbs
Overall Base Length	79"
Overall Width	43 1/4"
Overall Height	82 1/4"
Width Between Legs	35"
Boom Reach Retracted	60"
Boom Reach Extended	101"
Boom Height (lowest position)	40 1/2"
Boom Height (highest position)	120"
Ext. Boom Height (lowest position)	13 1/4"
Ext. Boom Height (highest position)	147 1/4"
Height of Legs	8 3/4"
Wheel Diameter-Load Wheels	8"
Wheel Diameter-Steering Wheels	6"

PUMPING CYCLES needed to raise boom through full travel; 31 with crane set for speed and 170 with crane set for power.

Certain models can be shipped NEXT DAY.

NOTE:
 Ruger can modify any standard dimensions to meet specific customer needs.

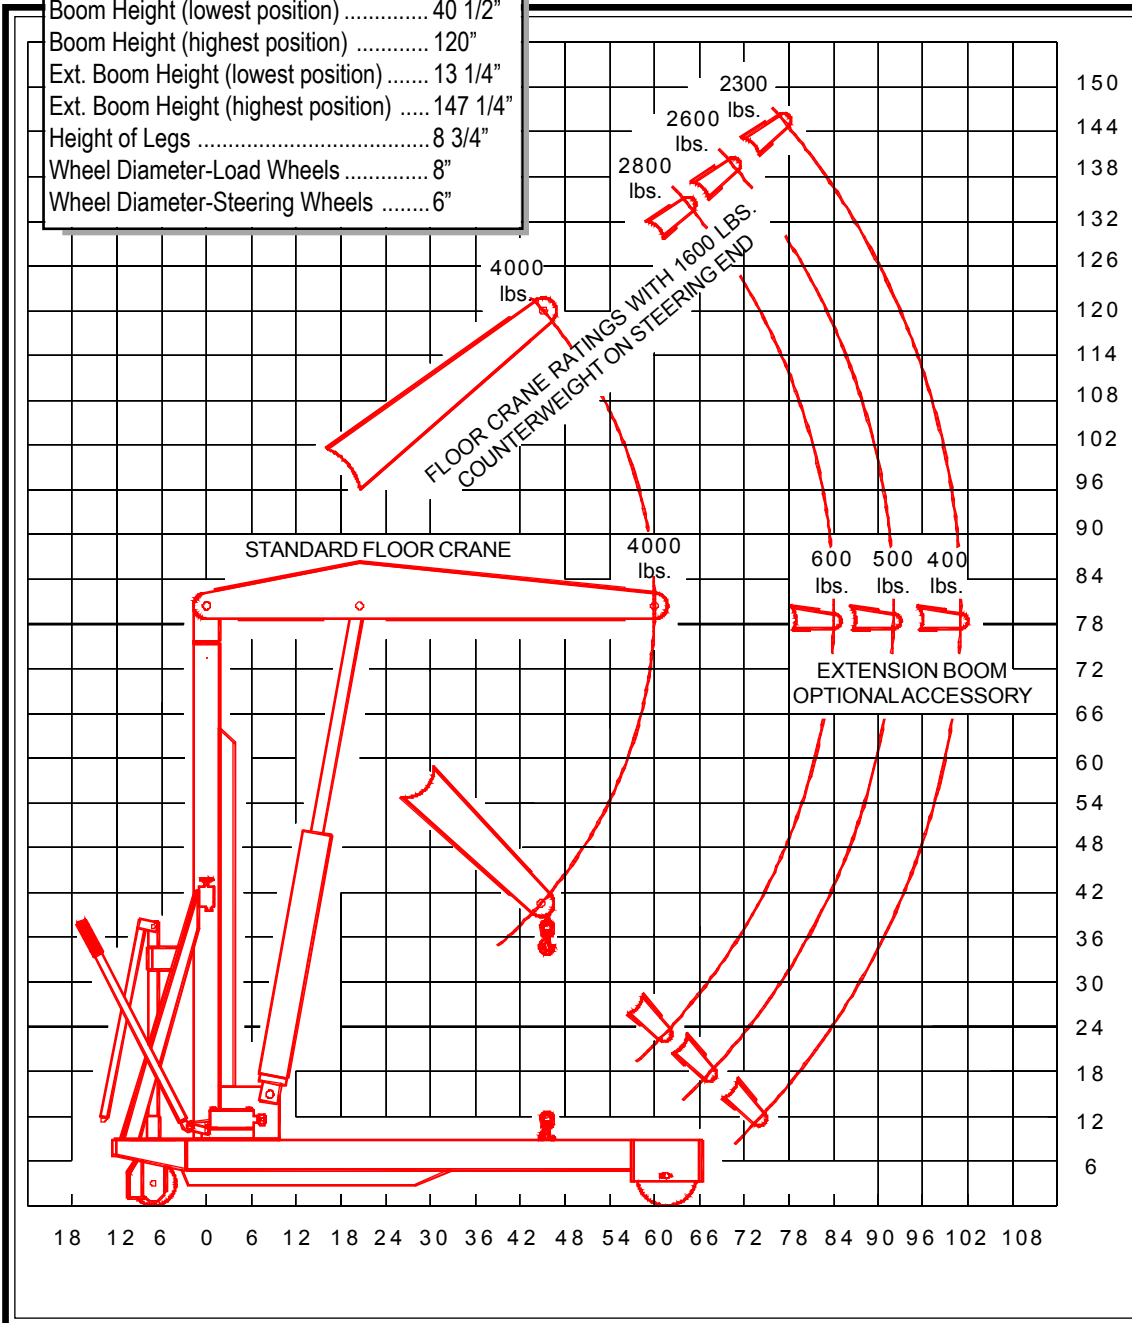

18 12 6 0 6 12 18 24 30 36 42 48 54 60 66 72 78 84 90 96 102 108