

David Round, Inc.
Ruger Division
10200 Wellman Road
Streetsboro, OH 44241
Phone: 440-248-4700
Fax: 440-248-8544
www.rugerindustries.com

VERSATILE

COMPACT

AFFORDABLE

RELIABLE

RC1000K

- 1000 lb. Capacity
- Compact Design to work in close quarters
- Folds Up into compact size of 19" Long, 28" Wide and 72" High

ACCESSORIES

- Barrel Grip
- Floor Lock
- Polyurethane or Steel Wheels

STANDARD FEATURES

- Meets Ruger's engineering standards of 150% structural overload of maximum rated capacity
- Completely self-contained hydraulic system with single action jack
- Built-in hydraulic hydraulic overload relief valve (An original Ruger patent)
- Needle type release valve permits pin-point control over lowering and holding of the heaviest or lightest loads
- Standard adjustable telescopic boom
- Standard phenolic resin wheels and roller bearings.
- Swivel hook with a safety latch to support heavy loads



The Fold-Away crane folds up in minutes for easy transport or convenient storage. The RC1000K has a manual built-in telescopic extension boom for more reach and height. Tested and exceeds ANSI/ASME PALD-12C standards. Meets ANSI Z.535

Prices, Specifications, and Options are subject to Change Without Notice.

All Ruger products are shipped F.O.B. Streetsboro, Ohio 44241
Unit Ships-NMFC #189240 - Class 85 Shipping Wt. 210 lbs

FAX: 440-248-8544

E-mail: info@davidround.com



David Round, Inc.
 Ruger Division
 10200 Wellman Road
 Streetsboro, OH 44241
 Phone: 440-248-4700
 Fax: 440-248-8544
 www.rugerindustries.com

VERSATILE

COMPACT

AFFORDABLE

RELIABLE


MODEL: RC1000K

Model.....	RC1000K
Max. Capacity.....	1000 lbs
Overall Base Length.....	63"
Overall Width.....	48"
Overall Height.....	72"
Width Between Legs.....	40"
Boom Reach Retracted.....	39"
Boom Reach Extended.....	51"
Boom Height (lowest position).....	25"
Boom Height (highest position).....	103"
Ext. Boom Height (lowest position).....	14"
Ext. Boom Height (highest position).....	113"
Height of Legs.....	5 1/4"
Wheel Diameter-Load Wheels.....	5"
Wheel Diameter-Steering Wheels.....	4"
Wheel Diameter - Base Steer Wheel.....	4"

PUMPING CYCLES
 needed to raise boom
 through full
 travel: 90.

Certain models can be
 shipped NEXT DAY.

NOTE:
 Ruger can modify
 any standard
 dimensions
 to meet specific
 customer needs.

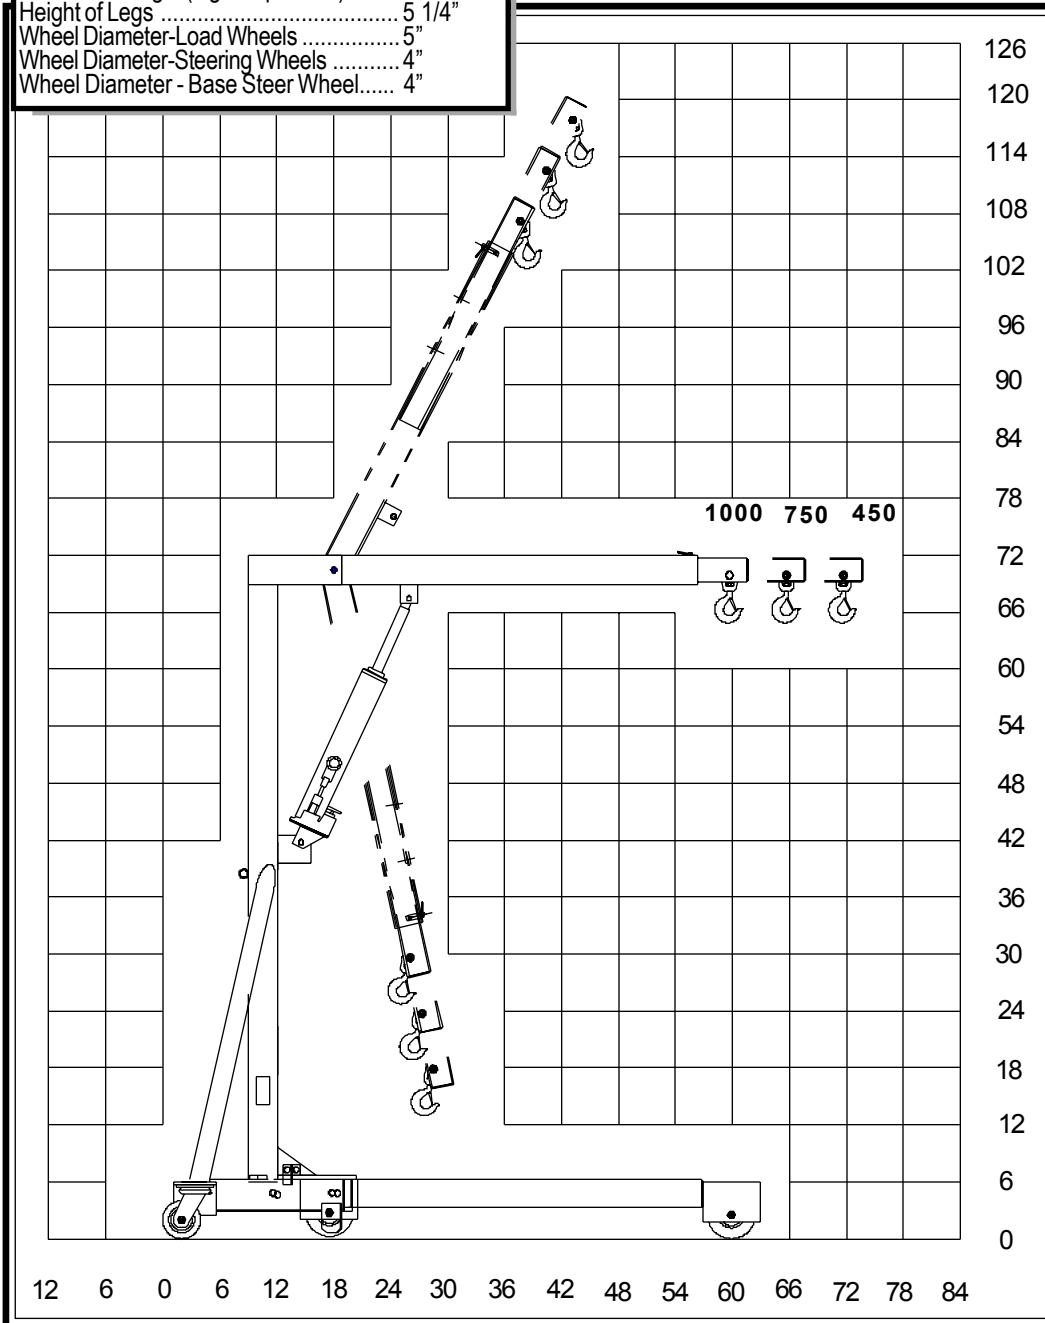

12 6 0 6 12 18 24 30 36 42 48 54 60 66 72 78 84